



Summano




Summano

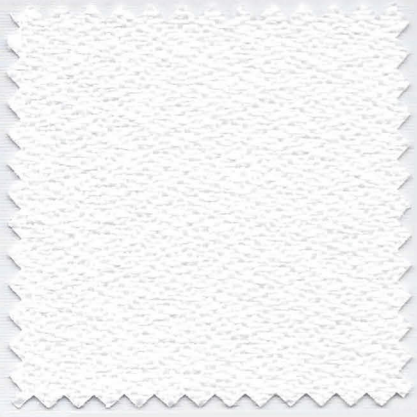


SU 13

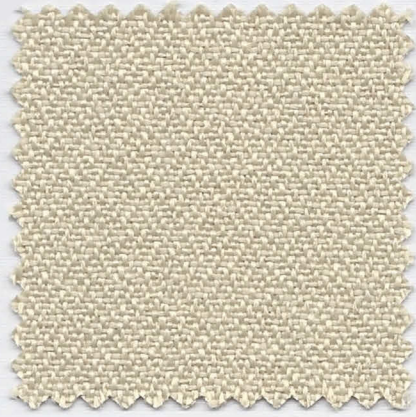


SU 07

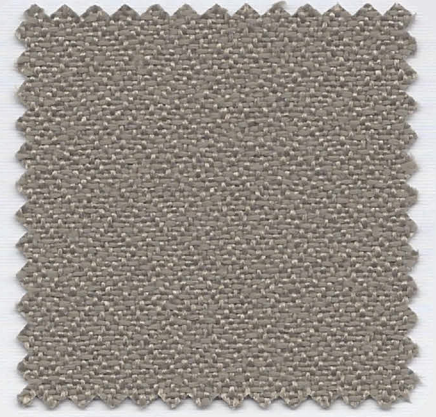


SU 08

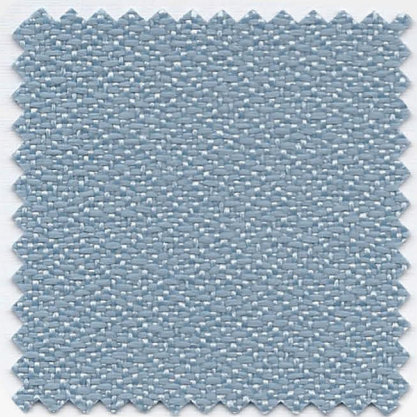


SU 377

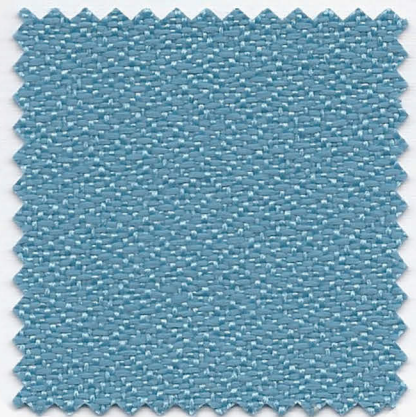


SU 379

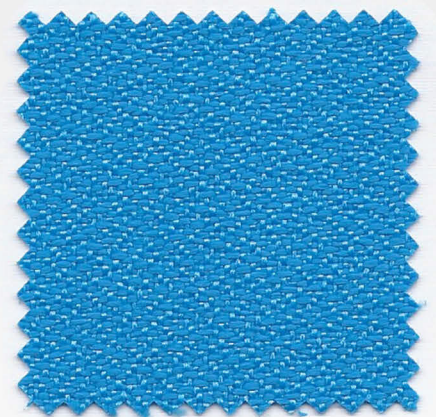


SU 29

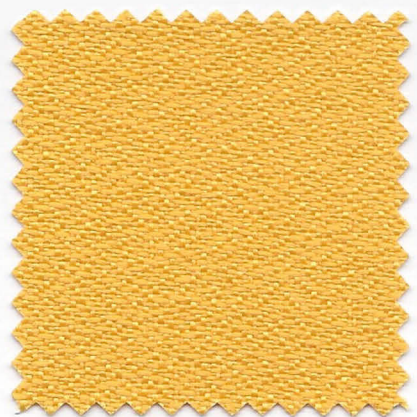

SU 21

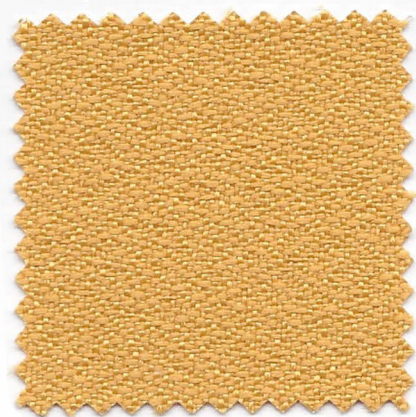


SU 01

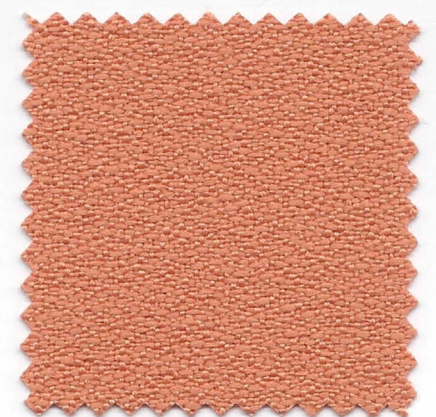


SU 02



SU 20

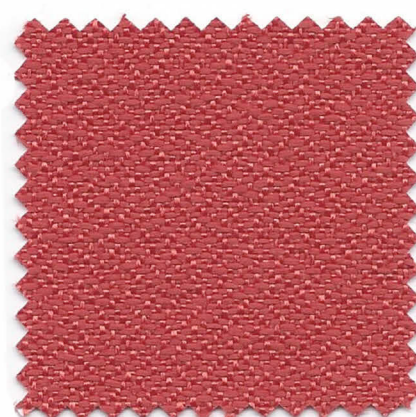

SU 120

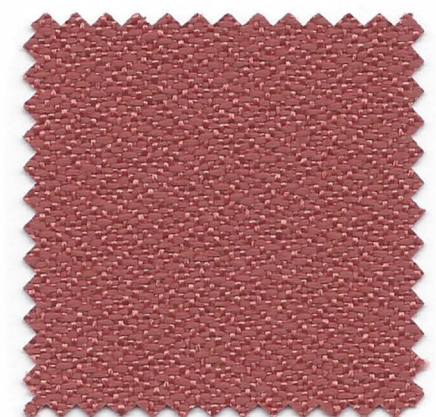

SU 572


Summano




SU 534




SU 10

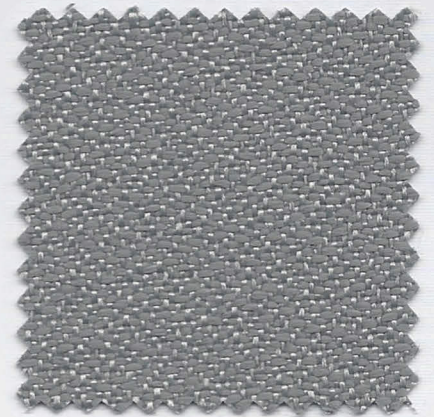


SU 625

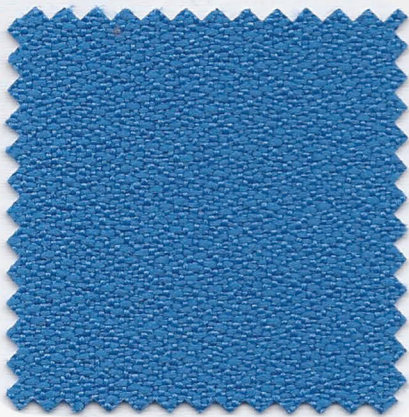


SU 12

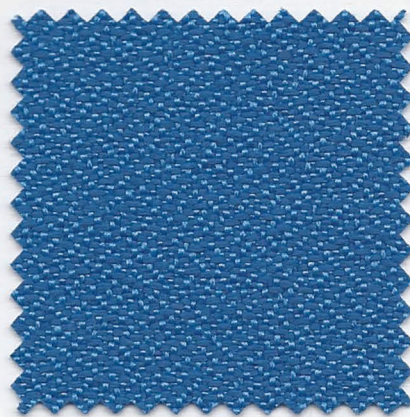


SU 04

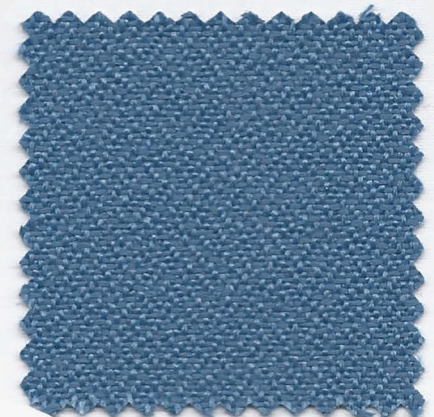


SU 15

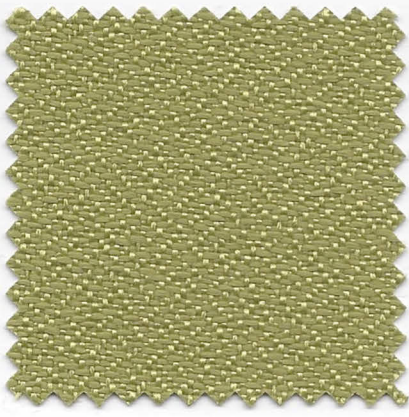

SU 426

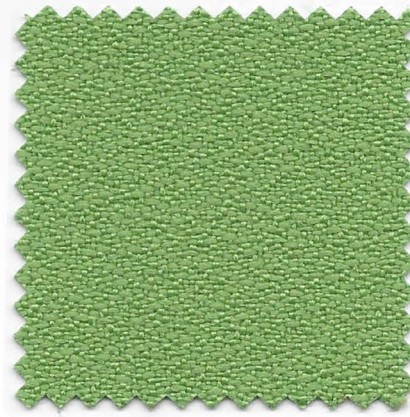


SU 03

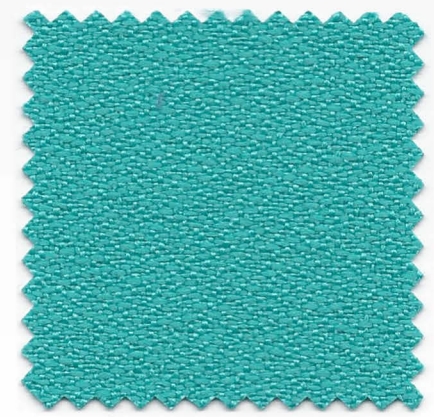


SU 26



SU 22

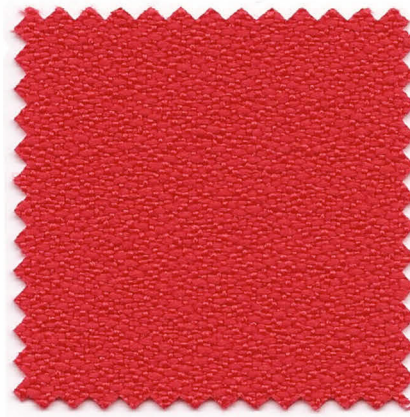

SU 05

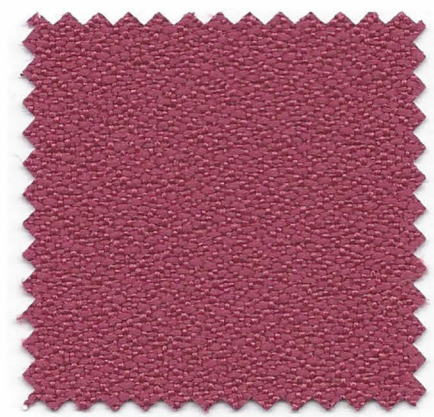


SU 23


Summano



SU 28

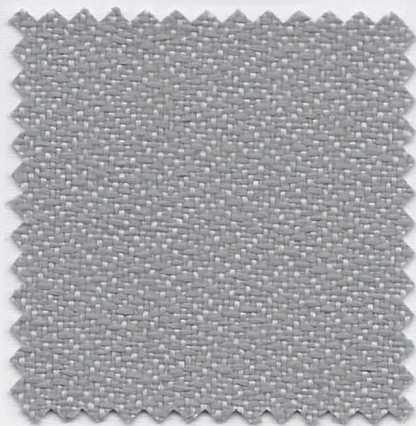


SU 629

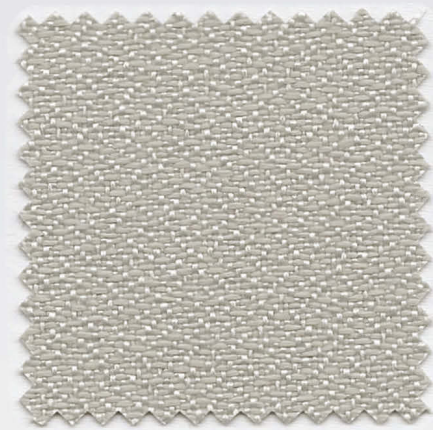


SU 27




SU 11

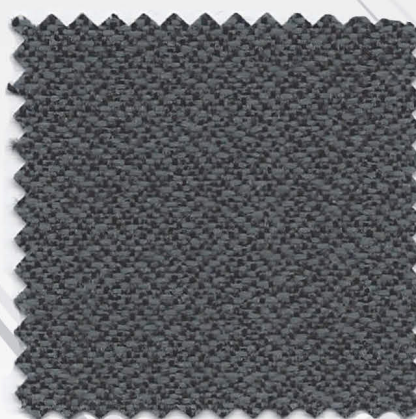


SU 06

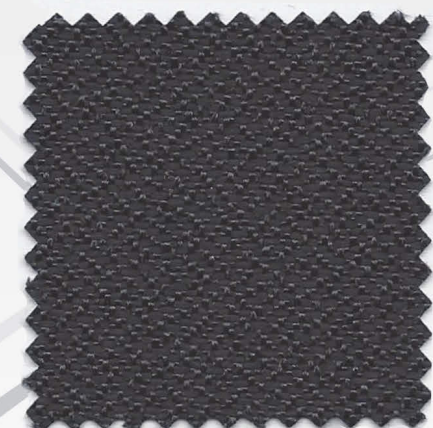


SU 09

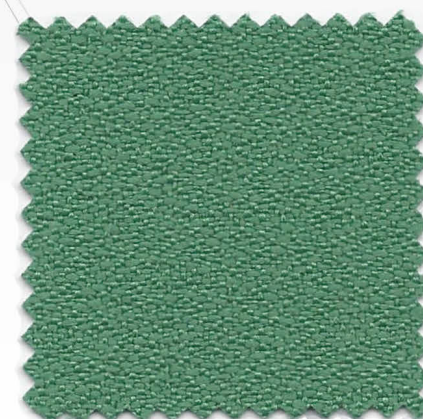


SU 25

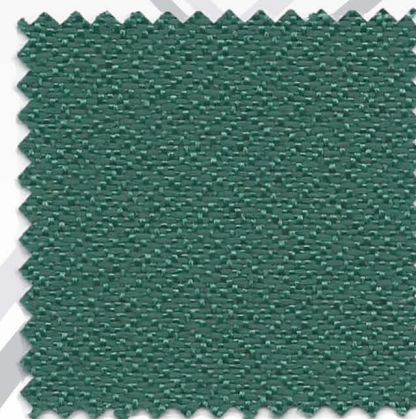


SU 496

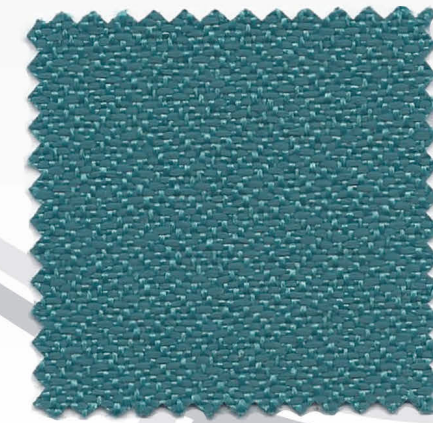

SU 411

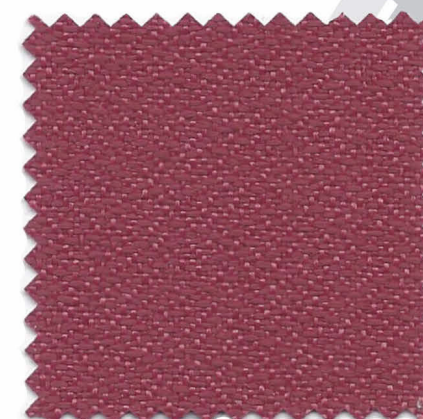

SU 236

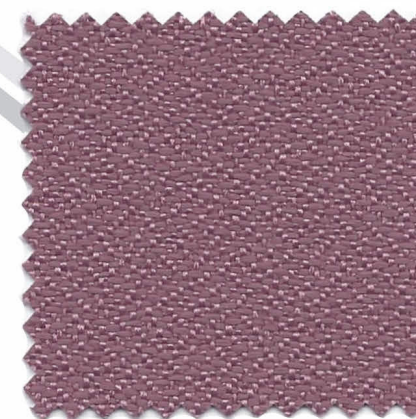

SU 175



SU 234

ART. SUMMANO

I	UK	D	F	E
Composizione 100% Poliestere FR	Composition 100% Polyester FR	Zusammensetzung 100% Polyester FR	Materiale 100% Polyester FR	Composición 100% Poliéster FR
Peso 250 g/m ² ± 15	Weight 250 g/m ² ± 15	Gewicht 250 g/m ² ± 15	Poids 250 g/m ² ± 15	Peso 250 g/m ² ± 15
Altezza 140 cm ± 2	Width 140 cm ± 2	Breite 140 cm ± 2	Langeur 140 cm ± 2	Ancho 140 cm ± 2
Lunghezza Rotolo 25 mt ±5%	Roll lenght 25 mt ±5%	Rolle länge 25 mt ±5%	Longuer rotulea 25 mt ±5%	Longitud rollo 25 mt ±5%
Resistenza all'abrasione >100000 cicli Martindale	Abrasion Resistance >100000 Martindale cycles	Scheuerfestigkeit >100000 Martindale Scheuertouren	Résistance à l'abrasion >100000 Martindale tours	Resistencia a la abrasión >100000 Martindale ciclos
Resistenza alla luce (EN ISO 105-B02) 5	Light Fastness (EN ISO 105-B02) 5	Lichtechtheit (EN ISO 105-B02) 5	Solidité à la lumière (EN ISO 105-B02) 5	Solidez a la luz (EN ISO 105-B02) 5
Resistenza allo sfregamento (EN ISO 105-X12) Umido: 5 Secco: 5	Fastness to Rubbing (EN ISO 105-X12) Wet: 5 Dry: 5	Reibechtheit (EN ISO 105-X12) Nass: 5 Trocken: 5	Solidité au frottement (EN ISO 105-X12) Mouillé: 5 Sec: 5	Solidez al rozamiento (EN ISO 105-X12) Húmedo: 5 Seco: 5
Infiammabilità 1IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 M1 B1	Flammability 1IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 M1 B1	Feuersicherung 1IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 M1 B1	Flammabilité 1IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 M1 B1	Inflamabilidad 1IM UNI 9175 EN 1021-1:2006 EN 1021-2:2006 CRIB 5 TB 117:2013 M1 B1
Assorbimento acustico: UNI EN ISO 354:2003	Acoustic Absorption: UNI EN ISO 354:2003	Schallabsorptions: UNI EN ISO 354:2003	absorption acoustique: UNI EN ISO 354:2003	absorción acústica: UNI EN ISO 354:2003
Solo su richiesta: idro-oleo repellente	Only on request: water repellency and oil repellency	Nur Auf: anfrage: hydrophobe und oleophobe	Seulement sur demande: hydrofuge et oléofuge	Soló a petición: repelencia al agua y repelencia al aceite
Colore Leggere differenze di colore fra una partita e l'altra sono da considerarsi normali	Colour Slight color differences between one lot and another have to be considered within commercial tolerance	Farbabweichungen Leichte farbunterschiede sind zwischen zwei Partien als normal su betrachten	Coloris Légères différences de couleur entre un lot et l'autre doivent être considérés comme étant normales	Color ligeras diferencias de color entre un lote y el otro son normales

 Stock Service

 Cut Service

